

Over 20 Weather Radars Supported
Reliable and Efficient LED Backlight System

MFD-640

Multi-Function Display

Display of:

- Weather Radar
- FMS Data
- TAWS
- Synthetic Vision
- Weather Graphics
- Traffic
- Lightning
- Video



Versatile and Powerful Retrofit Solution

In today's flight environment you need to take advantage of the multitude of information that is available. Your cockpit instruments can no longer be dedicated to the display of a single item. Panel real estate is scarce and information is plentiful. The MFD-640 Multi-Function Display offers a convenient, versatile and powerful retrofit solution.

The MFD-640 interfaces with a variety of Weather Radar, TAWS, and traffic avoidance systems as well as onboard video, Vision-1[®], Flight Management System (FMS), uplinked weather graphics and lightning detection systems. Its size and extensive interface capabilities makes it a versatile instrument for installation in a host of aircraft platforms, and will add valuable functionality for the operator.

Gain the ability to access a wealth of additional information including Universal Avionics' TAWS Terrain Awareness and Warning System displays in map, profile and 3-D views. View FMS data including flightplan with surrounding nav aids, airports and more. Monitor VOR/DME bearing /distance on the 360-degree or arc compass rose. Show surrounding air traffic and uplinked weather maps or access an onboard video camera.

The MFD-640 also features superior sunlight readability, high resolution and contrast, and super-wide viewing angles.



Supported Interfaces

- Flight Plan Data
- Weather Radar
- Synthetic Vision System
- Terrain Awareness and Warning System (TAWS)
- Enhanced Ground Proximity Warning System (EGPWS)
- Graphical Weather Images
- Traffic Collision and Avoidance System (TCAS)
- Lightning Detection Systems
- Video Interface Unit for interface with multiple video sources
- Radar Control Panel for interface with certain radar systems

Specifications

Hardware

Bezel: 5.17 in. H x 6.67 in. W
 Image Size: 3.86 in. H x 5.14 in. W (6.4 in. diagonal)
 Case Size: 4.975 in. H x 5.975 in. W x 8.27 in. D, excluding connector
 Weight: 8.5 lbs.
 Faceplate Color: Gray or Black
 MTBF: In excess of 7,500 hrs.
 Display: Active Matrix Color LCD
 Graphics: 256K colors (true 18-bit color, 6 bits RGB), anti-aliased
 Gray Shades: 64 levels per color
 Viewing Angle: + / - 60 deg. horizontal

Inputs/Outputs

Video: 2 VGA ports
 Data Bus I/O: ARINC 429/419 (6 Rx, 2Tx),
 ARINC 561/568 (1 port) and ARINC 453/708A (2 ports)
 and RS-422 (CSDB) (2 ports)
 Discrete Inputs: 12 (4 @ + 28V/open and 8 @ ground/open)
 Discrete Outputs: 4 (All ground / open)

Power

Primary Input: 28 VDC standard
 Lighting: 5V or 28V
 Consumption: 90 Watts max.
 Cooling: External cooling not required

Controls



Function switches and controls enable quick and effortless mode selection and configuration.

FAA TSO / ETSO

C63c, C105, C113, C119a

RTCA Documents

DO-160D, DO-174, DO-178B
 DO-160D Categories:
 [AZD1]BAB[SM,SB]XXXXXXXXZZAZRMXXA

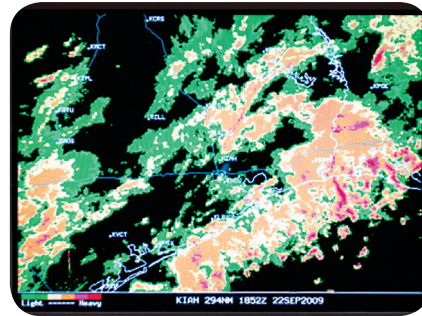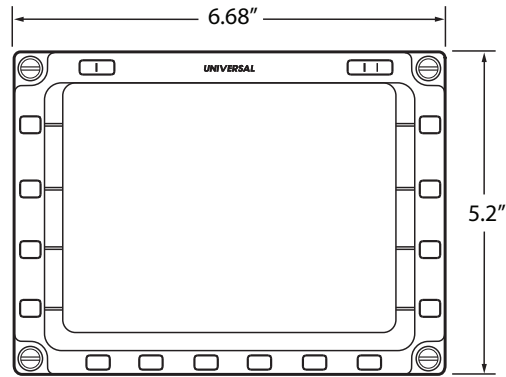

UniLink® Data / Weather Graphics



Video interface with onboard cameras



Corporate Offices Sales, Marketing & Support

3260 E. Universal Way
 Tucson, Arizona 85756
 U.S.A.
 Tel: (520) 295-2300
 (800) 321-5253
 Fax: (520) 295-2395

Midwest Operations Sales & Support

3815 Midco Street
 Wichita, Kansas 67215
 U.S.A.
 Tel: (316) 524-9500
 (800) 255-0282
 Fax: (316) 524-9700

European Office Sales & Support

P.O. Box 140
 CH-4030 Basel-Airport
 Switzerland
 Tel: +41-61-325-3660
 Fax: +41-61-325-3665

Internet

www.uasc.com
 E-mail: info@uasc.com

Features and capabilities are representative of systems at time of printing. Please contact your Universal Avionics marketing representative for the latest system enhancements. Specifications and graphic displays contained herein are subject to change without notice. System features may be limited based on interfacing equipment and type of installation. Universal® and Vision-1® are registered trademarks of Universal Avionics Systems Corporation.

 is a registered trademark of Universal Avionics Systems Corporation.