

USB Flash Drive and SD Card Support
Ethernet Ports Enable Quick Upload/Download of Data

SSDTU

Solid-State Data Transfer Unit

Centralized Data Transfer to and From Multiple LRUs
Lightweight, Solid-State Hardware
Fixed and Portable Versions



Adding Speed and Ease of Use to Your Data Transfers

Supporting Universal Serial Bus (USB) and Secure Digital (SD) media, the Solid-State Data Transfer Unit (SSDTU) represents the next generation of data upload and download equipment for your aircraft.

Easily accessible, high-speed media ports are conveniently located in the faceplate allowing for quick data file transfers between a USB drive or SD card and the aircraft's avionics systems. The SSDTU interfaces with up to eight Universal Avionics Line Replaceable Units (LRU) creating a centralized uploading / downloading center for:


- Flight Management System (FMS) databases and Internal Flight Data Recorder (IFDR) downloads
- Terrain Awareness and Warning System (TAWS) terrain, airport and obstacles databases
- Vision-1® Synthetic Vision System databases
- Charts, checklists and E-DOCS for the Application Server Unit (ASU) and its predecessor, Universal Cockpit Display (UCD) system
- UniLink® Communications Management Unit (CMU) databases
- Flight Data Recorder (FDR) download

Data files are transferred between the media ports and interfacing LRUs using a high-speed Ethernet data bus connection. To accommodate a variety of aircraft configurations, the SSDTU is available in fixed-mount and portable versions.

The SSDTU is designed to eliminate the dependence on obsolete floppy and ZIP disks required by the DTU and DTU-100, as well as the CD/DVD-ROM of the Accessible Data Unit (ADU).



System Architecture

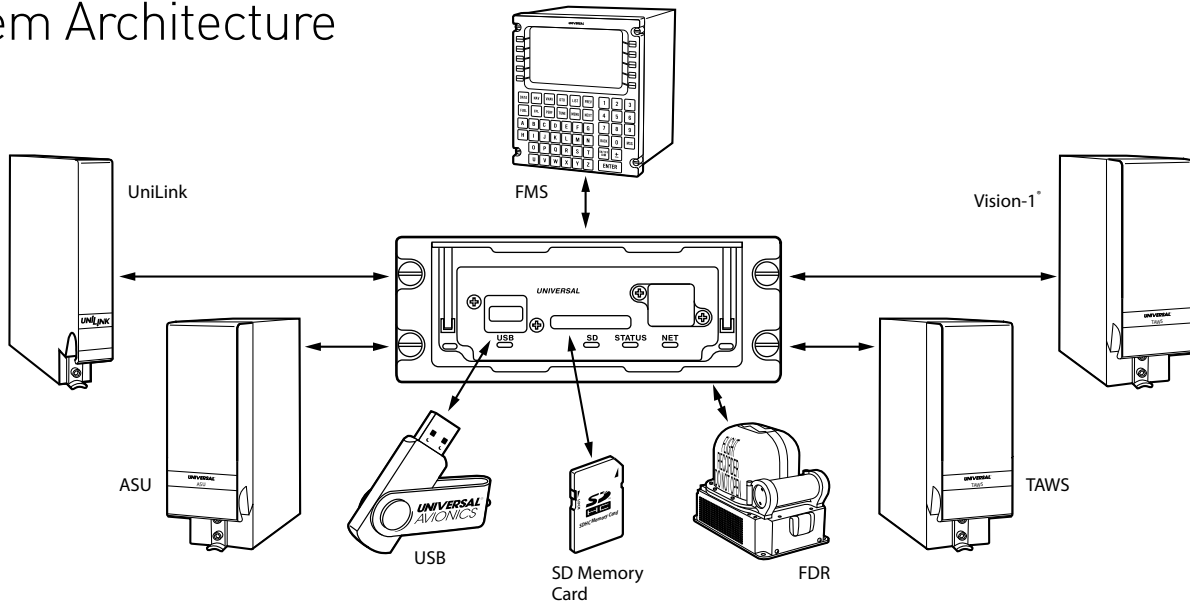

Specifications

Hardware

Bezel Size: 2.25 in. H x 5.75 in. W
 Depth: 7.76 in. (back of bezel to rear of connector)
 Weight: 2.4 lbs.
 Mounting: Dzus
Portable unit is also available
 Faceplate Color: Gray or Black
 Hard-wired to NCU

Data



Format: Digital
 Input: SD Card or USB Flash Memory
 Bi-directional data transfer via 10/100 Mb Ethernet

Power

27.5 VDC nominal
 28 Watts nominal

FAA TSO/ETSO

TSO C109
 ETSO C109

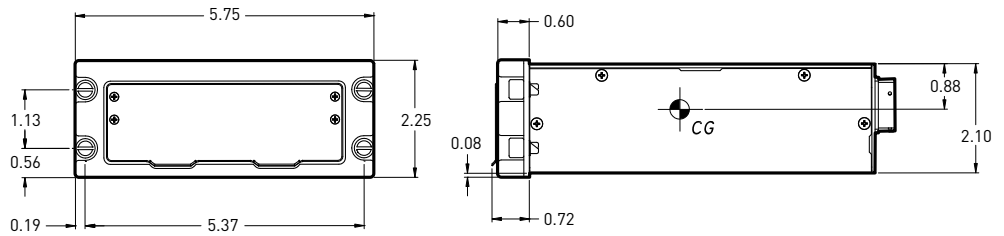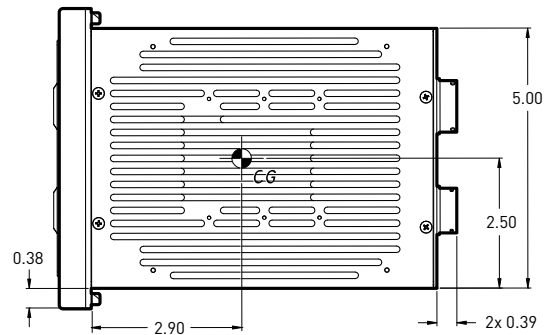

**Corporate Offices
 Sales, Marketing
 & Support**

3260 E. Universal Way
 Tucson, Arizona 85756
 USA
 Tel: (520) 295-2300
 (800) 321-5253
 Fax: (520) 295-2395

**Midwest Operations
 Sales & Support**

3815 Midco Street
 Wichita, Kansas 67215
 USA
 Tel: (316) 524-9500
 (800) 255-0282
 Fax: (316) 524-9700

**European Office
 Sales & Support**

P.O. Box 140
 CH-4030 Basel-Airport
 Switzerland
 Tel: +41-61-325-3660
 Fax: +41-61-325-3665

Internet

www.uasc.com
 E-mail: info@uasc.com

Features and capabilities are representative of systems at time of printing. Please contact your Universal Avionics sales representative for the latest system enhancements. Specifications contained herein are subject to change without notice.

